


English User Manual for

Linocell Fast 35 W USB Charger

Item: 29970, 29971

This user manual is designed for accessibility and screen reader compatibility.

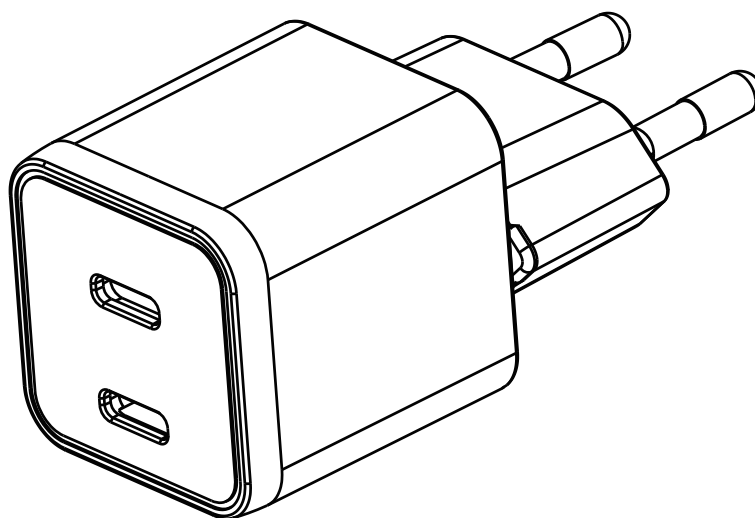






IMPORTANT. Make sure to read the full instruction manual before using the product. Keep the manual for future reference.

We reserve the right to correct any errors in text or images, and any necessary changes made to technical data. In the event of technical problems or other questions, please contact our Customer Services (www.kjell.com/kundservice).


Safety information

- Only connect devices designed to be charged or powered via USB.
- Using damaged or non-compliant cables or adapters may cause overheating or malfunction.
- Always unplug the adapter by holding the power plug.
- The mains plug is the disconnect device and must always remain easily accessible.
- This charger is intended for household use only and must be used indoors.
- Children should be supervised to ensure that they do not play with the appliance.
- Do not expose the charger to high temperatures, direct sunlight or moisture.

Symbol description

| | |
|---|--|
|  | <p>WEEE - Waste Electrical and Electronic Equipment.</p> <p>This symbol indicates that the product should not be disposed of with household waste. To protect the environment and human health from potential risks associated with improper disposal, the product should be recycled. Please take the product to an approved e-waste collection point or contact the retailer to ensure responsible handling and recycling.</p> |
|  | <p>This symbol indicates that the product uses direct current (DC).</p> |
|  | <p>This symbol indicates that the product complies with applicable EU directives and carries the CE mark. For details, see the Declaration of Conformity.</p> |
| <p>110–240 volt AC, 50–60 hertz</p> | <p>The input voltage of this product is AC power ranging from 110 to 240 volts, with a frequency of 50 to 60 hertz.</p> |
|  | <p>This symbol indicates that this product incorporates double insulation between hazardous mains voltage and user accessible parts. When servicing use only identical replacement parts.</p> |
|  | <p>This symbol states that the product is for indoor use only.</p> |

Overview and use

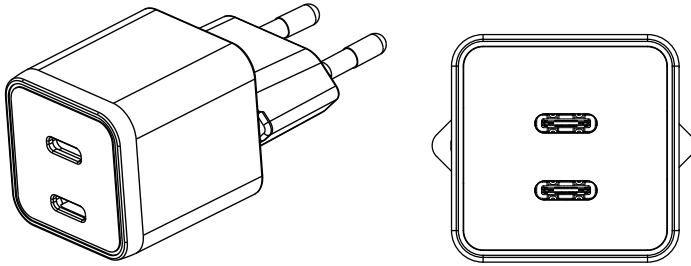

The figures show the charger with its two USB-C ports.

Port 1: USB-C PD port (Power Delivery).

Port 2: USB-C PD port (Power Delivery).

Connect the charger to a wall outlet and connect devices using USB-C cables.

Suitable devices include mobile phones, tablets, earphones, powerbanks, and other USB-charged devices (including devices with USB-A port when using a USB-C to USB-A cable).

Technical specifications

| | |
|-----------------------------------|--|
| Input: | 110–240 volt AC, 50–60 hertz, 1 ampere (max) |
| Total output: | Max 35 watt (DC) |
| Output per port: | PD 5 volt DC 3 ampere; 9 volt DC 3 ampere; 12 volt DC 2.5 ampere; 15 volt DC 2.33 ampere; 20 volt DC 1.75 ampere (35 watt max) |
| | PPS1: 5.0–11.0 volt DC, 3 ampere (33 watt max) |
| | PPS2: 5.0–16.0 volt DC, 2 ampere (32 watt max) |
| When both in use: | 20 watt + 10 watt (30 watt max) |
| | USB-C1: PD 5 volt DC 2 ampere; 9 volt DC 2.22 ampere; 12 volt DC 1.67 ampere (20 watt max) |
| | USB-C2: PD 5 volt DC 2 ampere (10 watt max) |
| Size: | 34 x 31 x 31 mm; |
| Weight: | 50 g; |
| Average active efficiency (%): | ≥81.62% (20 watt + 10 watt) |
| Low-load power efficiency (10%): | 81.71% |
| No-load power consumption (watt): | ≤0.300 watt |